


Access Panels **GypX**



Easy To Access

Part 1: Product Photos

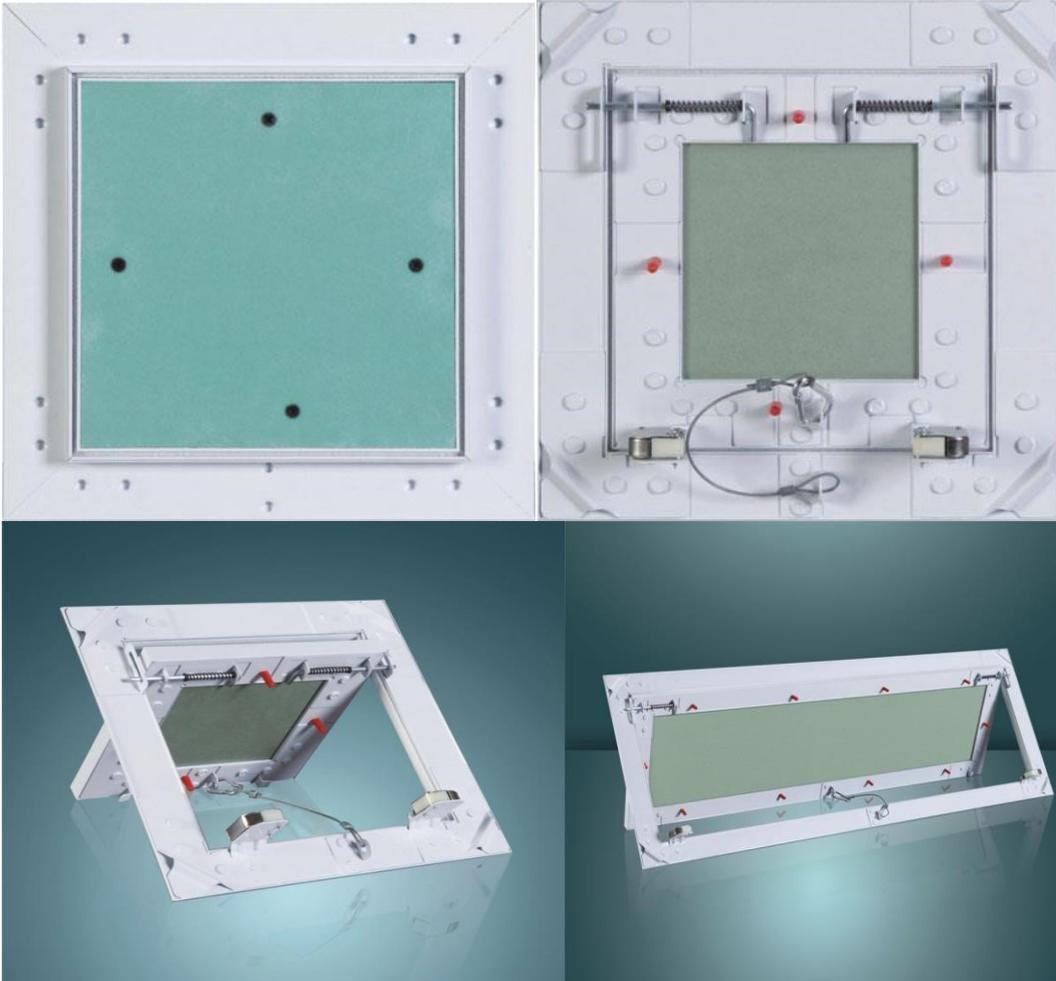

Easy To Access

Part 2: Technical Specifications

1. Outer Aluminium frame

Thickness: 1.5 mm (plus 0.2mm thick powder coating) Material:
EN AW6063

2. Inner Aluminium frame

Thickness: 1.5 mm (plus 0.2mm thick powder coating) Material:
EN AW6063

3. Corner fittings, outer frame

Material: Hot dipped galvanized steel plate
Thickness 2.0mm, with Zinc coating of 200g

4. Corner fittings, inner frame

Material: Hot dipped galvanized steel plate
Thickness 2.0mm, with Zinc coating of 200g

5. 12mm plasterboard (Knauf Brand)

Type: Moisture resistant (MR) in green plasterboard liner

6. Screw (self-drilling black phosphate)

Material: mild steel C1018-1022
Spec. M3*22, M3*25

7. Sealing strip, width, thickness

Width: 9.0mm
Thickness: 4.0mm

8. Snap Lock (spring catch/catch lock)

Type of lock: touch latch
Material of lock: Plastic ABS, cold rolled steel Q235

9. Hinge

Thickness: 4.0mm, length: 82mm;
Material: SS2172 (cold drawn steel wire)

10. Powder coating Color:

white, Ral 9010

Easy To Access

Part 3: Dimension (Tolerance: ±1mm)

Art. No.	Neck Size (mm)	Overall Size (mm)	Opening Size (mm)
GPX200	200*200	270*270	194*194
GPX300	300*300	370*370	294*294
GPX400	400*400	470*470	394*394
GPX500	500*500	570*570	494*494
GPX600	600*600	670*670	594*594
GPX60120	600*1200	670*1270	594*1194



Part 4. Drawings of Aluminum Profiles



1:1



1:1

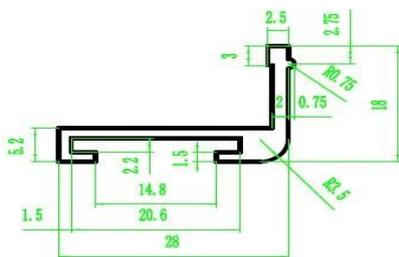

Access Panels **GypX**



Easy To Access

Part 5. Installation Picture

