

# TILE FIX Allrounder

## Adhesive



**Tile Fix Allrounder** is a ready to use grey cement based tile adhesive used for fixing medium size ceramic, mosaic & vitrified tiles for internal walls & floors and external floor application.

### KEY FEATURES

- Ready to use, only water needs to be added
- Faster to apply due to good spreadable properties
- Excellent high strength & water retention properties
- Suitable for fixing ceramic, mosaic & vitrified medium size tiles on walls & floors.

### ADVANTAGES

- Comes with anti-slip properties
- Excellent workability & smooth finish
- Superior bond strength.

### USES & APPLICATIONS



FOR Internal tiling application on walls (Medium size)



FOR internal tiling application on Floors (Medium size)




FOR External tiling application on Floors (Medium size)




TILE – ON – TILE applications


## SURFACE PREPARATION, MIXING & APPLICATION




Surface should be cleaned properly by removing all loose particles, oil grease etc Surface needs to be pre-wetted with clean water



Pour required quantity of Tile fix allrounder into water (22-25%) to get desired consistency



For mixing use spiral mixer at low speed in a clean bucket. Mix well to obtain a lump-free, smooth paste. After mixing leaves the mix for 5 minutes.

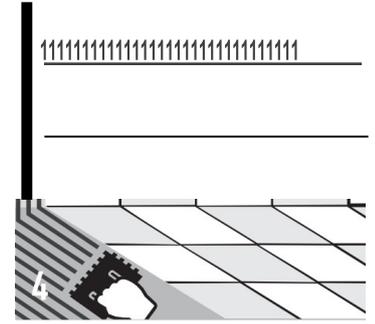

Briefly stir the mixture before Application Apply tile fix allrounder On suitable notch trowel on Surface

## TECHNICAL PROPERTIES

Mixed density: 1.50-1.70 kg/ltr  
Pot life: 180-240 minutes

Bulk density: 1.40-1.60 kg/ltr  
Open time: 20 minutes

Parameter		Value
Shear adhesion	Dry condition (24 Hrs)	>4.000KN
	Dry condition (14 Days)	>10.00KN
	Heat aging condition	>5.00KN
	Wet condition	>5.00KN
Tensile adhesive strength	Dry condition (28days)	>0.5N/mm <sup>2</sup>
	Water immersion (28days)	>0.5N/mm <sup>2</sup>
	Heat aging (28days)	>0.5N/mm <sup>2</sup>
	Open time after 20 minutes	>0.5N/mm <sup>2</sup>

## COVERAGE

A 40kg bag of Tile Fix Allrounder covers~ 110-120 sq. ft. at coverage of 3 mm thickness. Coverage depends upon quality and nature of substrate being used.

## PACKAGING, SHELF LIFE & STORAGE

- Available in 40kg Ad Star bag
- 6 months from the date of manufacturing
- Store in bag away from moisture